


Shuttle Lift Carrydeck 3330- Load Chart


TMK Equipment Rental and Lease, Inc

| OPERATING RADIUS FEET | 3 SECTION BOOM OR 4 SECTION BOOM WITH 4TH RETRACTED | | | 4 SECTION BOOM EXTENDED | | | PICK AND CARRY BOOM CENTERED OVER FRONT 3 SECTION BOOM OR 4 SECTION BOOM  | |
|-----------------------|---|-----------------------------|---------------|-------------------------|-----------------------------|---------------|--|--------------|
| | ON RUBBER LESS JIB 360° | ON FULL EXTENDED OUTRIGGERS | | ON RUBBER LESS JIB 360° | ON FULL EXTENDED OUTRIGGERS | | 4TH RETRACTED | 4TH EXTENDED |
| | | LESS JIB 360° | WITH JIB 360° | | LESS JIB 360° | WITH JIB 360° | | |
| 5 | 10000 | 15000 | 2900 | 6100 | 6100 | | 10000 | 4500 |
| 6 | 7600 | 13200 | 2900 | 6100 | 6100 | | 7600 | 4500 |
| 8 | 4700 | 11600 | 2500 | 4000 | 5300 | 3000 | 4700 | 4000 |
| 10 | 3000 | 10000 | 2300 | 2700 | 4700 | 2800 | 3000 | 2700 |
| 12 | 2300 | 8800 | 2100 | 2000 | 4400 | 2600 | 2300 | 2000 |
| 14 | 1800 | 6600 | 2000 | 1500 | 4400 | 2300 | 1800 | 1500 |
| 16 | 1400 | 5300 | 2000 | 1200 | 4400 | 2200 | 1400 | 1200 |
| 17.2 | 1300 | 4700 | 2000 | 1100 | 4400 | 2100 | 1300 | 1100 |
| 18 | | | 2000 | 1100 | 4400 | 2100 | | 1100 |
| 20 | | | 2000 | 900 | 3800 | 2000 | | 900 |
| 22 | | | 2000 | 700 | 3200 | 2000 | | 700 |
| 24 | | | 2000 | 600 | 2900 | 2000 | | 600 |
| 26 | | | 2000 | | | 2000 | | |
| 28 | | | | | | 2000 | | |
| 30 | | | | | | 2000 | | |
| 32 | | | | | | 1800 | | |

3330B LOAD RATING CHART (POUNDS)

- The rated loads are the maximum lifting capacities as determined by operating radius only. Any combination of boom lengths and angles may be used to obtain operating radius. The operating radius is the horizontal distance from a projection of the axis of rotation to the supporting surface, before loading, to the center of vertical hoist line or tackle with load applied.
- The rated loads shown do not exceed 85% of actual tipping. These ratings are based on freely suspended loads with the machine leveled, standing on a firm, uniform supporting surface. Practical working loads depend on supporting surface, operating radius, and other factors affecting stability. Hazardous surroundings, experience of personnel and proper handling must all be taken into account by the operator.
- Rated loads shown in the shaded areas, are based on structural strength and/or strength of material and not on the stability of the machine.
- The weights of all load handling devices, such as hooks, hook blocks, slings, etc., except the hoist rope, shall be considered as part of the load.
- Ratings on outriggers are with all the outriggers fully extended and fully down. If any of the outriggers are down but not fully extended, then the ratings shown on rubber shall apply.

HOIST TACKLE CHART

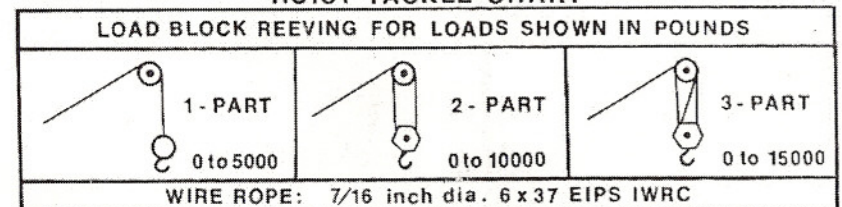

- Ratings on rubber depend on tire capacity, condition of tires, and proper inflation pressure. Loads on rubber may be transported at a maximum speed of 2.5 mph on a smooth hard level surface with boom retracted to the shortest length possible and centered over front. Pick and carry is not allowed with a load on the jib.
- For operating radius not shown, use load ratings of the next larger radius.
- The maximum combined total boom and deck load is 12,000 pounds. For deck loads only, the maximum load is 12,000 pounds with 9:00 x 15 tires or 14,000 pounds with 10:00 x 15 tires. Tire inflation at 100 psi.
- NO EXTERNAL SIDE LOAD TO BE INDUCED ON BOOM.
- OPERATION OF THIS EQUIPMENT IN EXCESS OF RATING CHARTS AND DISREGARD OF INSTRUCTIONS IS DANGEROUS AND VOIDS WARRANTY.